DEMOLITION NOTES THIS SHEET

1. REMOVE AND DISPOSE OF EXISTING ELECTRIC WATER HEATER APPROX ___ GALLONS.
2. DRAIN COLD WATER PIPE FOR PREPARATION FOR NEW ISOLATION VALVE–REFER TO NEW WORK PLANS.
3. REMOVE FIXTURE(S) AND ASSOCIATED PIPING AS SHOWN, CAP DRAIN BELOW FLOOR, REMOVE TRAP IF FIXTURE IS A FD.
4. ACTIVE WASTE TO REMAIN IN OPERATION SCHEDULE SHUTDOWN TO REPLACE– REFER TO NEW WORK PLAN.

NOTE TO CONTRACTOR

ALL EXISTING PIPE TO REMAIN UNLESS OTHERWISE NOTED. DISPOSE OF ALL PIPE AND FIXTURES REMOVED, UNLESS OTHERWISE NOTED.

SAW CUT NOTE:

CONTRACTOR SHALL SAW CUT, REMOVE & PATCH CONCRETE FLOOR AS REQUIRED TO PERFORM WORK INDICATED. PATCH FLOOR TO MATCH ADJACENT EXISTING CONDITIONS. CONTRACTOR SHALL VERIFY PIPE INVERTS PRIOR TO SAW CUTTING.

ASBESTOS AND LEAD PAINT NOTE

AN ASBESTOS INSPECTION WAS PERFORMED AND ASBESTOS CONTAINING MATERIALS WERE FOUND GENERALLY IN THE AREAS INDICATED IN THE ASBESTOS SURVEY/INSPECTION REPORT WHICH IS AVAILABLE TO THE CONTRACTOR(S) FOR HIS INFORMATION. ASBESTOS CONTAINING MATERIALS HAVE BEEN REMOVED UNDER A SEPARATE CONTRACT.

A LEAD–BASED PAINT INSPECTION WAS PERFORMED AND LEAD–BASED PAINT WAS FOUND IN THE AREAS INDICATED. THE CONTRACTOR SHALL BE RESPONSIBLE WITH ALL REQUIREMENTS OF THE VIRGINIA OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION REGULATIONS LEAD–BASED PAINT PROTECTION OF WORKERS.

NOTE TO CONTRACTOR:

INSULATED ETR PIPE IS NOT TO BE DISTURBED, CONTRACTOR SHALL REPAIR AND SEAL ANY INSULATION DAMAGED DURING CONSTRUCTION.

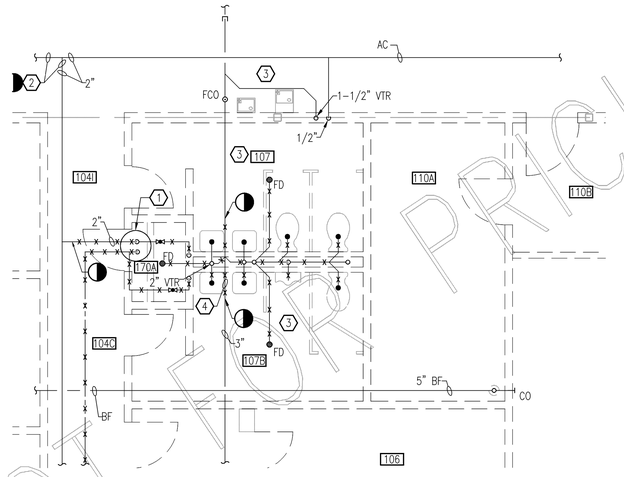

PLUMBING DEMOLITION ENLARGED PLAN
SCALE: 1/4" = 1'–0"
2 PD1.2W PD1.7W

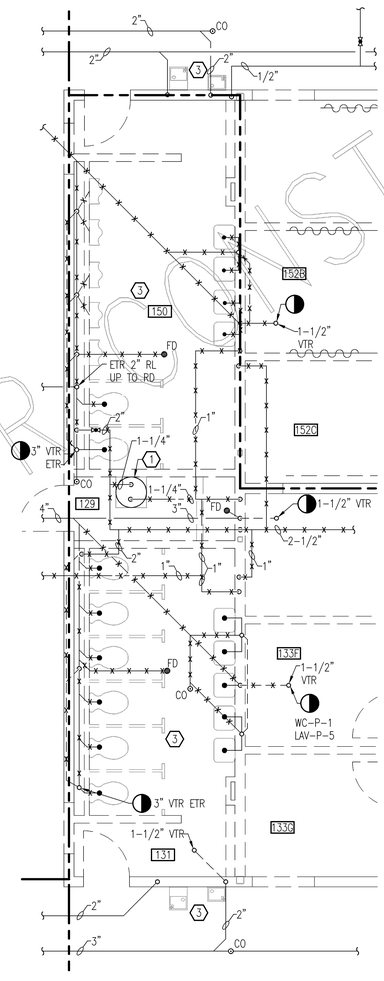

PLUMBING DEMOLITION ENLARGED PLAN
SCALE: 1/4" = 1'–0"
1 PD1.4W PD1.7W

GRAPHIC SCALES

1/8" = 1'–0" 5' 0' 5' 10' 20'

nbj ARCHITECTURE
A Professional Limited Company
GROVE PARK SQUARE
11537-B NUCKOLS ROAD
Richmond, Virginia 23059
(804) 273-9811 fax: (804) 273-9843

RAPPAHANNOCK COMMUNITY COLLEGE
CAMPUS RENOVATIONS
WARSAW + GLENNS, VIRGINIA
PC: 260–17712

WARSAW CAMPUS PLUMBING
ENLARGED DEMOLITION PLANS

Date: JANUARY 13, 2010

REVISIONS

NO.	DATE

PACE COLLABORATIVE
MECHANICAL ELECTRICAL ENGINEERS
VIRGINIA BEACH, VA • 757-499-7229

COMMONWEALTH OF VIRGINIA
JOHN M. NEWELL
Lic. No. 035329
01.13.10
PROFESSIONAL ENGINEER

Sheet
PD1.7W

File Number
9004

NOT FOR PRICING OR CONSTRUCTION